


BPS® 1000

Banknote Processing System




Giesecke & Devrient
Creating Confidence.

Giesecke & Devrient – 150 years of experience



In the high-speed processing market, the BPS 1000 from Giesecke & Devrient (G&D), with around 1,400 system installations, is the undisputed global market leader. It is a new development and succeeds the highly successful ISS 300, sold widely around the world for over 20 years. The BPS 1000 is one of G&D's BPS family of coordinated products.




Our competence – your advantage with the BPS 1000


The modular design of the BPS 1000 allows the system to be supplied in numerous variations, enabling it to meet the requirements of central banks, commercial banks, security transport companies, and casinos. With up to 20 stackers, it offers a high degree of flexibility and ideal configurability.

Benefits of the BPS 1000 at a glance

- High level of flexibility and productivity
 - Several different currencies and mixed denominations can be processed in 4 orientations
 - High processing speeds allow for easy handling of large volumes (400,000 to 700,000 banknotes per system and shift)
 - A wide range of customer applications is provided or can be programmed
 - Software is easily updated for the processing of new series or additional currencies
- High-performance sensors
 - Extremely sensitive CCD color sensors (NotaScan®) scan and evaluate the complete face of each banknote, both front and back
 - Banknotes are inspected to ensure fitness, and soiled or damaged notes are sorted out, thereby maintaining a high level of quality of the currency in circulation
 - Each banknote undergoes thorough authentication; suspected counterfeits are sorted out
 - Reliable sorting results based on automatic self-testing and centrally administrated software adaptations

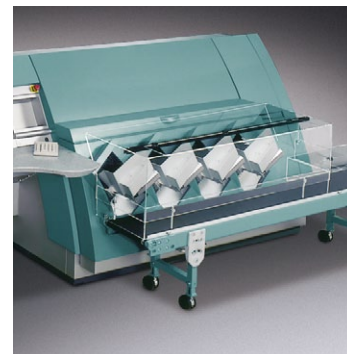

BPS 1000: Configuration examples

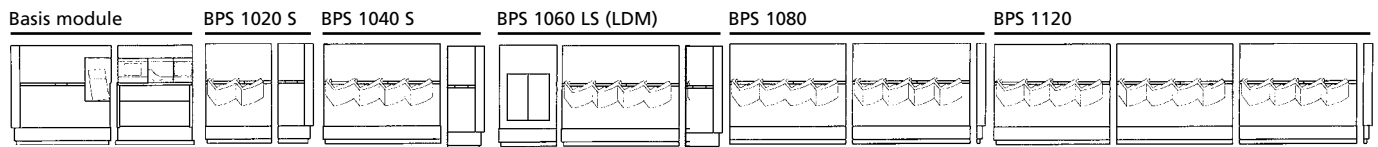

- High degree of automation
 - Banknotes are banded in packages of 100 (standard)
 - On-line bundling (optional)
 - Automatic transport and wrapping (optional)
 - Electronic report generation and direct data transfer for subsequent processing
- Highly developed security concept
 - On-line shredder for internal destruction of unfit banknotes
 - Machine and sensor software as well as sensitive customer data are protected against manipulation
 - Smart card, PIN-based access control system restricts use of the machine to authorized personnel
 - Optimum counting accuracy enhances security
- Ergonomically designed and easy to use

Standard modules and components

- Up to 20 delivery stackers possible, in combinations of
 - Modules with 2 or 4 stackers
 - Large delivery module (LDM) with 2 stackers for up to 2,000 loose banknotes per stacker
- Interchangeable cartridges for fast and safe banknote removal
- One bundler per stacker
- On-line shredder module

Banknote feeding

- Up to 2,000 loose banknotes can be placed in the singler; continuous feeding during singling is possible
- Nonstop processing of customer deposits is enabled by the use of header cards*
- Rerun of rejected banknotes reduces the time required for manual inspection

Sensors

- 10 slots for modular sensors allow tailor-made solutions
- Customized adaptation possibilities for banknotes
- The NotaScan® CCD color sensor for full-face scanning of one banknote side in red, green, blue, and infrared spectrums, detecting:
 - Denomination, orientation
 - Banknote size
 - Infrared properties (authenticity)
 - Soil
 - Stains, graffiti (optional)
 - Missing parts, dog-ears
- Thickness sensor for detection of double or multiple items, adhesive tape, tears
- Other optional sensors
 - Additional NotaScan® CCD color sensor for full-face scanning of the reverse side of the banknote
 - Sensors detecting ultraviolet dullness, fluorescence/phosphorescence, magnetic and mechanical properties, electrical conductivity
 - Special sensors for G&D high-level security features
 - Third-party sensors can also be integrated

Banding


- Automatic on-line banding for each stacker
- Text for printing onto bands can be configured as needed (up to 80 characters)

Bundling

- Automatic on-line bundling of 10, optionally 5 packages
- On-site retrofit for later upgrade possible
- Simple replenishment of consumables

Bundle delivery options

- Manual
 - Bundles are ejected onto each bundler's banknote collecting plate (maximum of 3 to 5 bundles per plate) and removed by the operator
- Automatic
 - Banknote packages are automatically stacked, banded, ejected, and deposited onto a conveyor belt

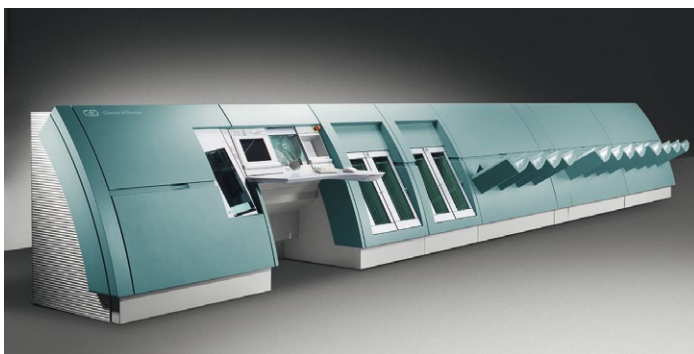

Reject compartment

- For direct inspection of rejected banknotes (e.g. suspected counterfeits or banknotes in poor condition)
- Capacity of up to 250 banknotes
- If header cards* are used, rejects are subsequently processed together with the header cards

Hardware and software

- High-performance industry-standard computer with Windows® operating system, Oracle® database and GUI application software
- LAN/WAN connectivity (with Windows® support)
- Application based on an Oracle® database, allowing high flexibility in customer applications, e.g. data transfer, report configuration
- Large number of processing modes and reports

- Interface (XML reports) for data transfer to cash management systems such as G&D's Compass^{CM}Entrée and others

System components

The BPS 1000 system is supplemented with various hardware and software components offered by G&D as a single-source provider. This ensures consistent processes for the flow of material and data.

- The Compass^{CM}Entrée cash management system records and manages all deposit data for the accounting of the depositor and vault information. It also supports the inspection of rejected banknotes, permitting maximum utilization with the highest turnover

- The BDS 400 product family can vacuum shreddings from destroyed banknotes and press these into briquettes as needed
- Conveyor belts guide the bundled banknotes to the NotaPack® banknote packaging system. There the banknotes are securely packed in tamperproof foil without manual access and labeled (optional)
- The barcode reader permits fast and reliable identification of the individual deposits and speeds up the accounting of smaller units

Comprehensive customer service from G&D

- Low maintenance requirements and long maintenance cycles
- Installation and training by G&D specialists
- Customized maintenance agreements

Giesecke & Devrient GmbH
Prinzregentenstrasse 159
P.O. Box 80 07 29
81607 Munich
GERMANY
Phone: +49 (0) 89 41 19-0
Fax: +49 (0) 89 41 19-85 20
www.gi-de.com
gd.sales@gi-de.com

© Giesecke & Devrient GmbH, 2011.
BPS®, NotaPack®, NotaScan®, and Compass^{CM} are registered trademarks of Giesecke & Devrient GmbH. Windows® is a registered trademark of the Microsoft Corporation. Oracle® is a registered trademark of the Oracle Corporation. All technical data subject to change. G&D patents.



Technical Data

Based on the BPS 1040S

Dimensions (L/W/H)

3,823 x 1,063 x 1,156 mm (can be dismantled for transport purposes)

Weight

Approx. 860 kg

BN sizes accepted

Length: 100–180 mm
Width: 60–90 mm

Processing speed

Optionally 20 BN/s or 30 BN/s

Transport speed

5 m/s or 7.5 m/s

Theoretical throughput

72,000 BN/h or 108,000 BN/h

Pneumatic module

Power consumption 5.4 kW

System availability

Typically > 96%
(depending on service status)

Power supply

230 V/400 V, 50/60 Hz
120 V/208 V, 50/60 Hz

Power consumption

Basis machine 2.1 kW

Ambient conditions

Ambient temperature: 15–30°C
Relative humidity: 30–80%

Noise level

67–77 dB (A)

Spatial requirements

Approx. 25 m² (incl. traffic area)

Certifications

CE mark
GS certificate for approved safety

* The header card technology used in this product is licensed by Currency Systems International, Inc. of Irving, Texas, on the basis of U.S. Patent No. 5,917,930 and further patents in other countries.